

Memflo Mini Polytetrafluoroethylene Filter Cartridges

Memflo Mini Polytetrafluoroethylene Filter Cartridges are suitable for solvent and chemical filtration including acid, alkali with high thermal stability. Also suitable for the most demanding microfiltration applications.



Features and Benefits

- High filtration area
- No adhesives, binders, or surfactants
- Suitable for Steam and Hot water Sanitization
- Absolute rated removal rating
- Available in a wide-variety of micron sizes

Application

- Sterile vents
- Fine chemicals and solvents
- Pharmaceutical
- Sterile process gasses
- Photoresists

Dimensions

Lengths available: 1.5", 2.5", 5"

Pore Size

0.2 μ , 0.45 μ , 0.65 μ and 1.0 μ

Operating Conditions

- Maximum forward differential pressure: 4.0 bar at 20°C
2.0 bar at 80°C
- Maximum operating temperature : 80°C

Gas Sterilisation



The filter can be gas sterilised at 125°C for 25 minutes

Memflo Mini Polytetrafluoroethylene Filter Cartridges


Material of Construction

Media	: Polytetrafluoroethylene
Media support	: Polypropylene
Cage core and end caps	: Polypropylene
Sealing	: Thermally welded

Ordering Guide

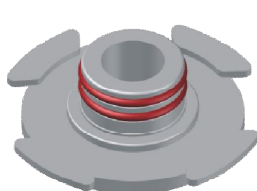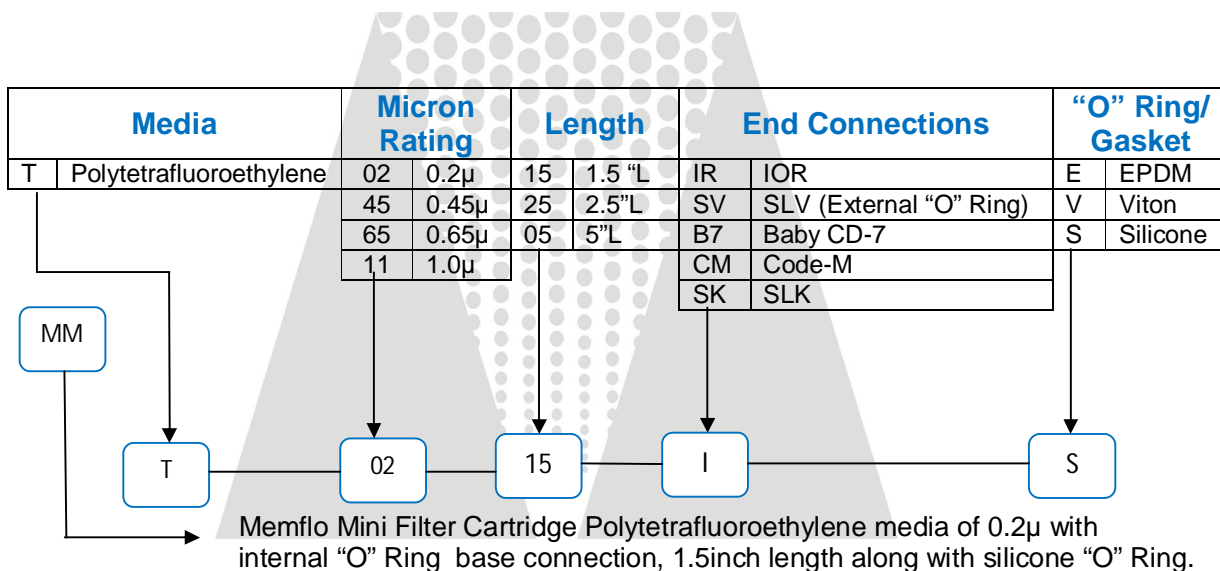


SLV with slot

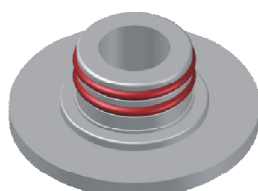

SLV




SLK




Internal "O" - Ring with slot



Baby code-7



Code-M



Internal "O" - Ring