


Memflo Mini Nylon 6,6 Filter Cartridges

Memflo Mini Nylon 6, 6 Filter Cartridges are suitable for absolute removal of unwanted particulates, bio-burden reduction, clarification of a wide range of process liquids and end products.

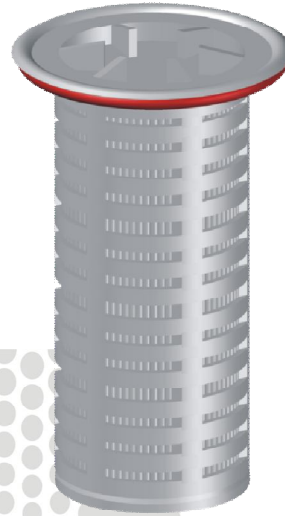

Features and Benefits

- Wide chemical compatibility
- High flow rate with excellent dirt holding capacity
- Absolute rated micron rating
- Integrity Testable
- Available in a wide-variety of micron sizes

Application

- Ultrapure water supply system
- Sterile Filtration
- Biopharmaceutical
- Fine chemicals and solvents
- Beverages

Dimensions

Lengths available: 1.5", 2.5", 5"

Pore Size

0.2 μ , 0.45 μ , 1.0 μ , 3.0 μ and 5.0 μ

Operating Conditions

- Maximum forward differential pressure: 4.0 bar at 20°C
2.0 bar at 80°C
- Maximum operating temperature : 80°C

Memflo Mini Nylon 6,6 Filter Cartridges



Sterilisation



The filter can be sterilised by steam - in - place procedure at 121°C for 20 minutes

Material of Construction

Media : Nylon 6, 6
 Media support : Polypropylene
 Cage core and end caps : Polypropylene
 Sealing : Thermally welded

Ordering Guide

Media		Micron Rating		Length		End Connections		"O" Ring/ Gasket	
N	Nylon 6, 6	02	0.2µ	15	1.5 "L	IR	IOR	E	EPDM
		45	0.45µ	25	2.5"L	SV	SLV (External "O" Ring)	V	Viton
		11	1.0µ	05	5"L	B7	Baby CD-7	S	Silicone
		33	3.0µ			CM	Code-M		
		55	5.0µ			SK	SLK		

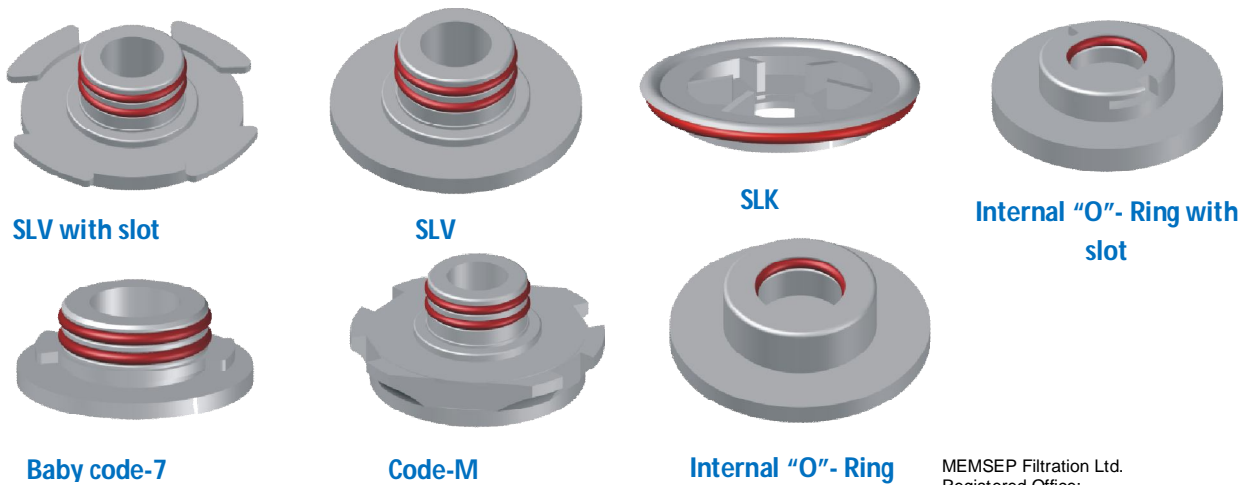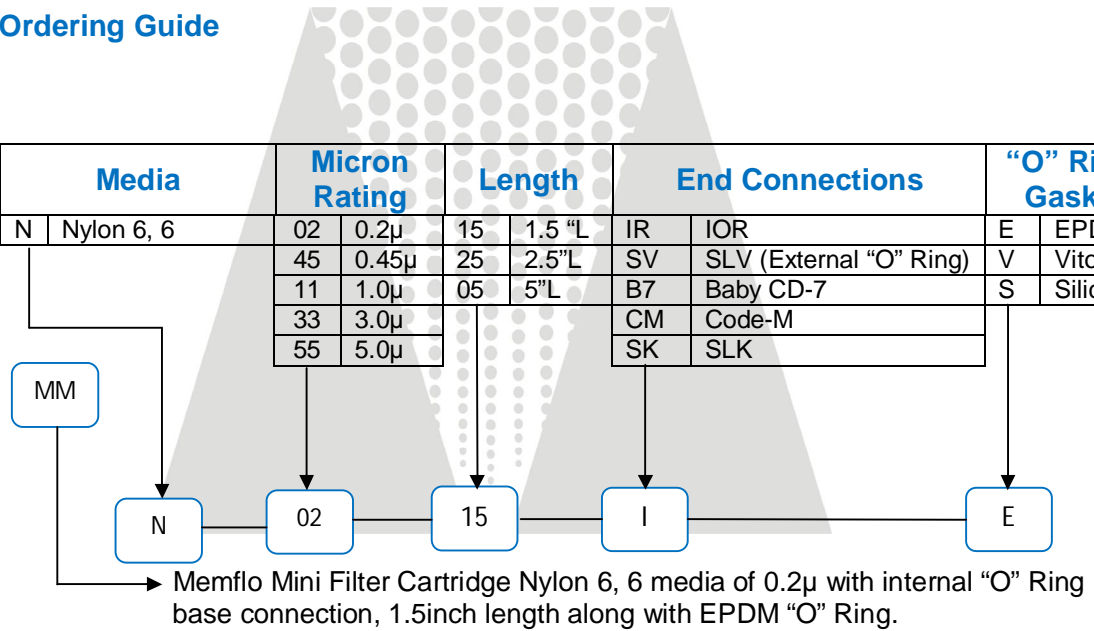

MEMSEP Filtration Ltd.
 Registered Office:
 Peridot House, Anmore Road,
 Denmead, Waterlooville, Hants, PO7 6NP
 Company Registration No. 08263201
info@memsepfiltration.com
 Mob. - +44 (0) 7789980624